


2 IN 1 OUT CONNECTOR

Description

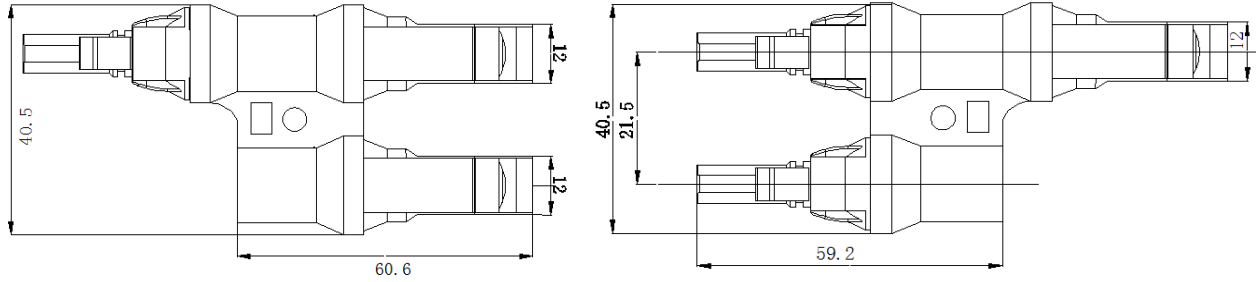

Main specifications:

- with the capacity of age and UV-resistance;
- the pv connector can be used in the atrocious weather.
- Stable automatic lock-system makes connectors open and close easily
- IEC 62852:2015 ●Certification:TUV SUD ●Certificate No:B 17 10 87944 008

3. Technical parameters

Insulation material:PC
 Contact material: Red copper tin plating
 Rated voltage: 1500V DC
 Safe class: Class II
 Contact resistance: $\leq 0.5m\Omega$
 Temperature range: $-40^{\circ}C \sim +85^{\circ}C$
 Degree of protection: IP67
 Flame class: UL94-V0
 Connector unmating force:360Newton



| | |
|--|--|
| | |
| | |
| | |
| | |

